

HSM VK 1206



Kanalballenpresse HSM VK 1206

Für Industrieanwendungen mit kleinem bis mittlerem Materialaufkommen - Durchsatz bis ca. 99 m³/h

Technical data

Order number:	6618001	Loading aperture width x Loading aperture length:	670 x 600 mm
Pressing power:	159 kN	Bale width x Bale height x Bale length:	750 x 500 x 600-1200 mm
Specific pressing power:	42,4 N/cm²	Length x Width x Height:	4795 x 2863 x 1565 mm
Driving power:	9,2 kW	Weight:	3,4 t
Voltage / Frequency:	400 V / 50 Hz	Type of consumables:	Wire
Cycle time when idling vacío:	8,2 s	Press material:	Plastic film, Mixed paper, Cardboard, Punch waste/residue, PET beverage and aluminium cans, soft packaging, PET
Volume throughput in idle operation (theor.):	99 m³/h		
Volume throughput at 50kg/m³ (theor.):	4.95 t/h		

Product information



Suitable for continuous loading with conveyor belt, air feeding or similar



Particularly suitable for cardboard, plastic film and PET bottles




Available as an option with manual strapping



System solution

Integration into automated industrial production processes.

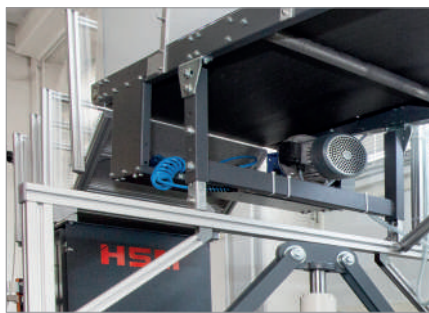

Continuous loading

Suitable for continuous loading with conveyor belt, air feeding or similar.



Compact bales

The bales can be stacked and are easy to transport.



Automatic operation

Control of the pressing process via light barrier.



Operating side

Can be fully integrated into existing workflows and processes. Operating side can be selected.



Sturdy design

Very low space requirement thanks to compact and sturdy design.

